




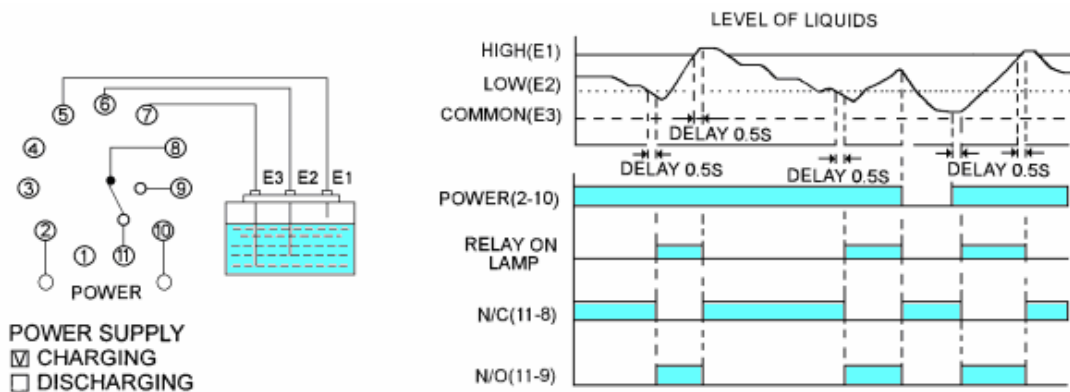
液面控制繼電器

本系列產品用於控制水位，如低水位即自動補水，如滿水位即自動排水。

Model No.		Classification		
		JLC-1	JLC-2	JLC-3
Appearance				
Features		Water Supply or Water Drainage for controlling conductive liquids under 40 kΩ	Water Supply for controlling conductive liquids under 40 kΩ	Water Drainage for controlling conductive liquids under 40 kΩ
Surface Mounting		Socket base 8PFA	Socket base P2CF11	Socket base P2CF11
Output Capacity		SPDT		
Response Time of Relay		Standard : 0.5 SEC		
Frequency		50Hz or 60Hz		
Rated Voltage (Range:85%~110%)		110VAC , 220VAC , 380VAC , 415VAC		
LIFE	Mechanical	10,000,000 Times		
	Electrical AC220VPF=1	500,000 Times		
ACCURACY	Repeat	*****		
	Setting	*****		
	Voltage	*****		
	Temperature	*****		
Reset time		0.2 Sec Max		
Ambient temp. & Humidity		-10~55Deg.C , 85% Max		

(2) JLC-2 (供水)

當液位低於E2 之位準時，繼電器第11 腳與第9 腳會於0.5 秒延遲後接通，同時啓動幫浦開始供水，直到水位到達E1(高水位)超過0.5 秒時，繼電器回到原來位置(第11 腳與第8 腳接通)並停止供水。



(3) JLC-3 (排水)

當液位高於E1 之位準時，繼電器第11 腳與第9 腳會於0.5 秒延遲後接通，同時啓動幫浦開始抽水，直到水位到達E2(低水位)超過0.5 秒時，繼電器回到原來位置(第11 腳與第8 腳接通)並停止排水。

