
















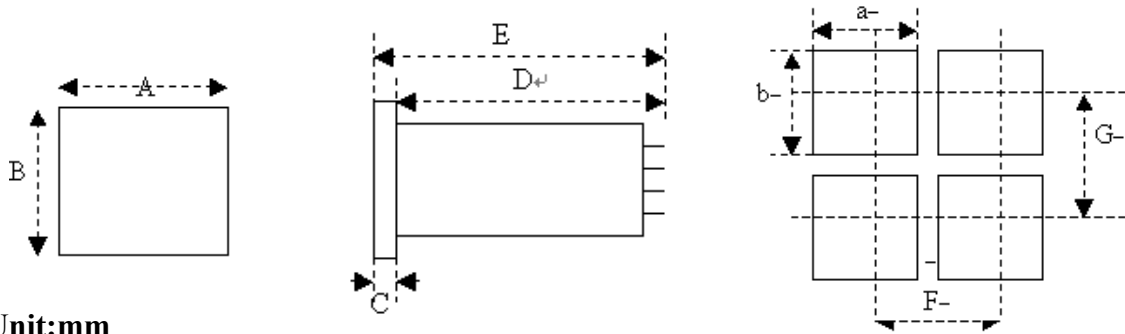
Size	96mm*96mm		
Classification			
Model	K961	K962	K963
Appearance			
Features	Analogy setting Non-indicating	Analogy setting Indicating	Analogy setting Deviation indicating
Size	96mm*96mm		
Classification			
Model	K964	K965	K966
Appearance			
Features	Push wheel Digital setting Deviation indicating	Analogy setting, LED Digital indicating	Push wheel digital Setting LED Digital indicating
Size	72mm*72mm		
Classification			
Model	K721	K723	K724
Appearance			
Features	Analogy setting Non-indicating	Analogy setting Deviation indicating	Push wheel Digital setting Deviation indicating

Classification	Size	72mm*72mm		48mm*96mm
	Model	K725	K726	MC-48
Appearance				
Features	Analogy setting, LED Digital indicating	Push wheel digital setting, LED indicating	Push wheel Digital setting Deviation indicating	
Classification	Size	48mm*48mm		48mm*96mm
	Model	K481	K482	DC-48
Appearance				
Features	Analogy setting Non-indicating	Push wheel digital setting, LED indicating	Push wheel digital setting, LED indicating	

SPECIFICATIONS

Rated Voltage & Frequency	AC 110/220V (85~110%), 50/60Hz
Input	K(CA), J(IC), PT100Ω
Output	Relay 5A 250VAC, SSR Drive
Control Mode	ON/OFF, PD (for digital type)
Alarm Control	Upon customer's demand
Setting Accuracy	+/-0.5 ~1% of full scale
Ambient Temperature & Humidity	0 ~ 55Deg.C, 85% Max


Dimensions & Panel Cut-out



Unit:mm

Series	A	B	C	D	E	F	G	a	b
48*48	48	48	6	86	92	62	65	45±0.5	45±0.5
72*72	72	72	7	118	125	90	95	68±0.5	68±0.5
96*96	96	96	13	107	120	110	115	90±0.5	90±0.5
48*96	48	96	11	100	111	62	115	45±0.5	90±0.5

Wiring Diagram

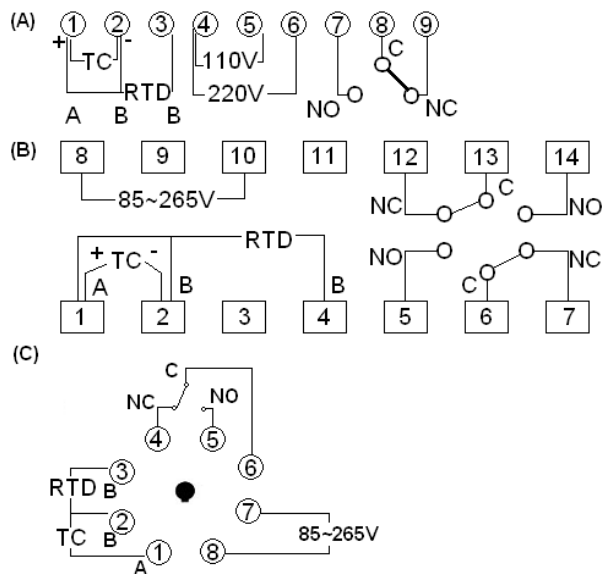

Thermocouples (Special and Variety of specifications upon customers request.)

