



MODEL : MC48/K724/K964

Features : push wheel digital setting, Deviation indicating
 指撥數字設定, 偏差表顯示



MC48


K724/K964

Temperature : Range MC48 : 0-199Deg.C 0-399Deg.C 0-999Deg.C
 K724/k964 : 0-199Deg.C 0-399Deg.C

SPECIFICATIONS

Rated Voltage & Frequency	AC 110/220V (85~110%), 50/60Hz
Input	K(CA), J(IC), PT100Ω
Output	Relay 5A 250VAC, SSR Drive
Control Mode	ON/OFF, PD (for digital type)
Alarm Control	Upon customer's demand
Setting Accuracy	±0.5 ~1% of full scale
Ambient Temperature & Humidity	0 ~ 55Deg.C, 85% Max

Dimensions & Panel Cut-out

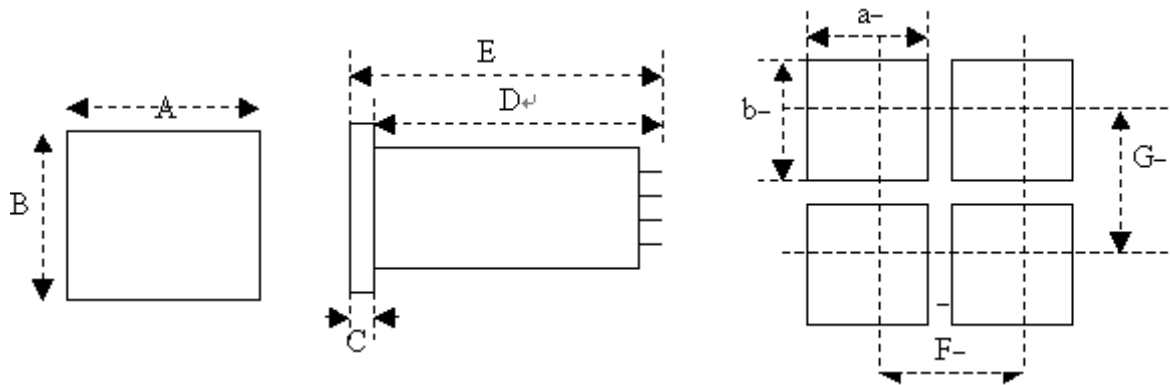

Unit:mm

Series	A	B	C	D	E	F	G	a	b
48*48	48	48	6	86	92	62	65	45±0.5	45±0.5
72*72	72	72	7	118	125	90	95	68±0.5	68±0.5
96*96	96	96	13	107	120	110	115	90±0.5	90±0.5
48*96	48	96	11	100	111	62	115	45±0.5	90±0.5

Wiring Diagram

