



MODEL : MC48/K724/K964

Features : push wheel digital setting, Deviation indicating



MC48


K724/K964

Temperature : Range MC48 : 0-199Deg.C 0-399Deg.C 0-999Deg.C  
 K724/k964 : 0-199Deg.C 0-399Deg.C

## SPECIFICATIONS

<b>Rated Voltage &amp; Frequency</b>	AC 110/220V (85~110%), 50/60Hz
<b>Input</b>	K(CA), J(IC), PT100Ω
<b>Output</b>	Relay 5A 250VAC, SSR Drive
<b>Control Mode</b>	ON/OFF, PD (for digital type)
<b>Alarm Control</b>	Upon customer's demand
<b>Setting Accuracy</b>	±0.5 ~1% of full scale
<b>Ambient Temperature &amp; Humidity</b>	0 ~ 55Deg.C, 85% Max

## Dimensions & Panel Cut-out

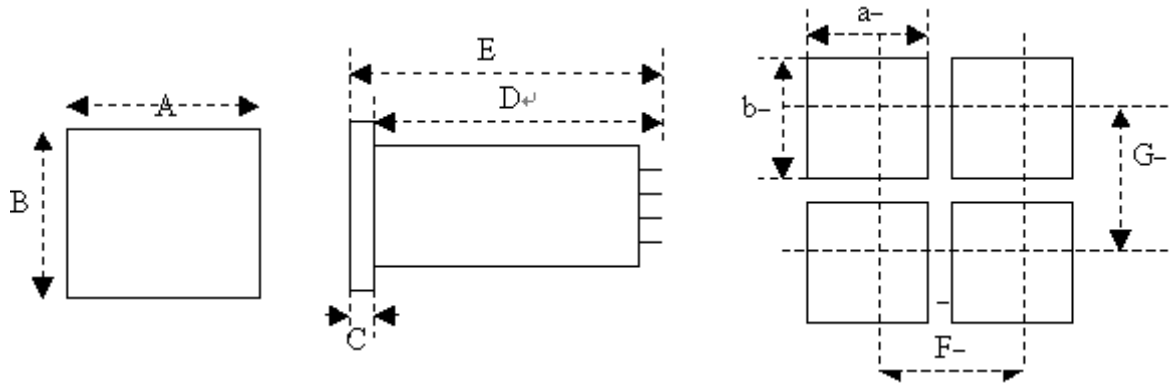

Unit:mm

Series	A	B	C	D	E	F	G	a	b
48*48	48	48	6	86	92	62	65	45±0.5	45±0.5
72*72	72	72	7	118	125	90	95	68±0.5	68±0.5
96*96	96	96	13	107	120	110	115	90±0.5	90±0.5
48*96	48	96	11	100	111	62	115	45±0.5	90±0.5

## Wiring Diagram

