



## SUBMINIATURE ON DELAY TIMER

	Model No.		
Classification		JMY-2	JMY-4
Appearance			
Output contacts		2 FORM C	4 FORM C
Contacts capacity		5A /250VAC	
Rated frequency & Voltage		50/60HZ, DC 12V, DC 24V, DC 48V, AC 110V, AC 220~240V ( OPERATING VOLTAGE RANGE: 85~110% )	
Rated time range		1S, 3S, 6S, 10S, 30S, 60S, 3M, 6M, 10M, 30M, 60M, 10HR	
Mounting ( Surface type )		WITH SOCKET PYF-08A	WITH SOCKET PYF-14A
LIFE	Mechanical	10,000,000 Times	
	Electrical AC220VPF=1	500,000 Times	
ACCURACY	Repeat	+/- 0.2% Max	
	Setting	+/- 5% Max	
	Voltage	+/- 0.5% Max	
	Temperature	+/- 2% Max	
Reset time		0.1 Sec Max	
Ambient temp. & Humidity		-10~55Deg.C , 85% Max	

### CONNECTION DIAGRAM & TIMING CHART

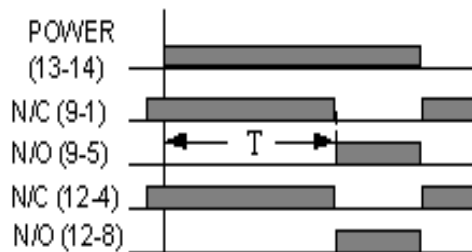

**JMY-2**

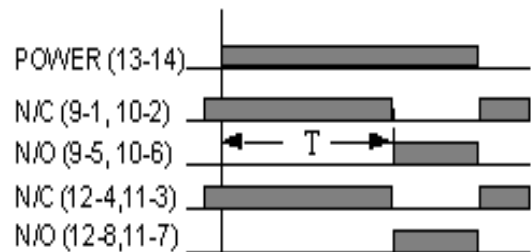

**JMY-4**